


8 TO 18 GHz DOUBLE-BALANCED MIXER

MODELS: DM0818LW1

FEATURES

- RF/LO coverage 8 to 18 GHz
- IF operation DC to 7 GHz
- LO power range +7 to +13 dBm
- Conversion loss..... 6 dB typical
- LO-to-RF isolation 30 dB typical

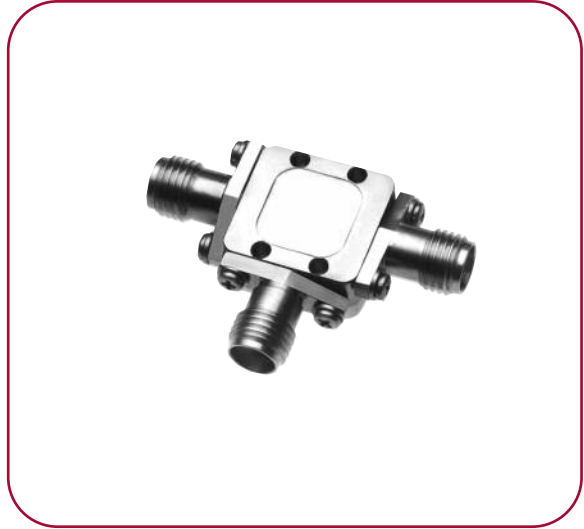




MITEQ's DM0818 Series of mixers is constructed using double-tuned microstrip RF and LO baluns with a DC-coupled IF structure. The construction, coupled with the hermetic packaging, provides for high inherent reliability and isolation over an extremely broad frequency range. This device performs as an up- or downconverter covering most EW bands and communication applications. This mixer is also available with high forward voltage diodes (H) yielding proportional changes in LO power and spurious performance.

ELECTRICAL SPECIFICATIONS

INPUT PARAMETERS	CONDITION	UNITS	MIN.	TYP.	MAX.
RF frequency range		GHz	8		18
RF VSWR (RF = -10 dBm, LO = +10 dBm)	8 to 18 GHz	Ratio		1.5:1	
LO frequency range		GHz	8		18
LO power range		dBm	+7	+10	+13
LO VSWR (LO = +10 dBm)	8 to 18 GHz	Ratio		3:1	
TRANSFER CHARACTERISTICS	CONDITION	UNITS	MIN.	TYP.	MAX.
Conversion loss (IF = 100 MHz, LO = +10 dBm)	8 to 18 GHz	dB		6	8
Single-sideband noise figure	8 to 18 GHz	dB			9
LO-to-RF isolation	8 to 18 GHz	dB	25	30	
LO-to-IF isolation	8 to 18 GHz	dB	15	25	
IF-to-RF isolation	DC to 7 GHz	dB	20	40	
Input power at 1 dB compression	LO = +10 dBm	dBm		0	
Input two-tone third-order intercept point	LO = +10 dBm	dBm		+10	
OUTPUT PARAMETERS	CONDITION	UNITS	MIN.	TYP.	MAX.
IF frequency range	3 dB bandwidth	GHz	DC		7
IF VSWR (IF = -10 dBm, LO = +10 dBm)		Ratio		2:1	



DM0818LW1 TYPICAL TEST DATA

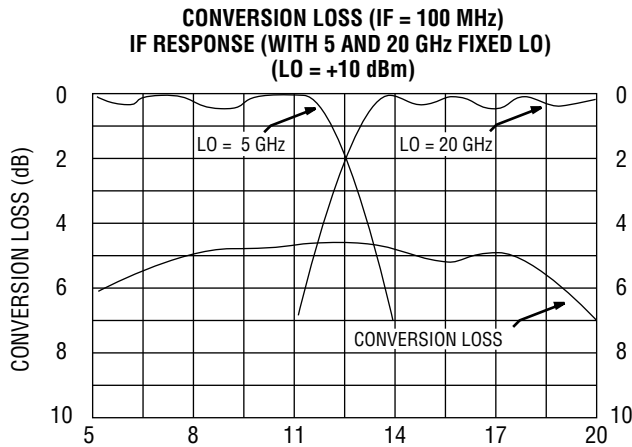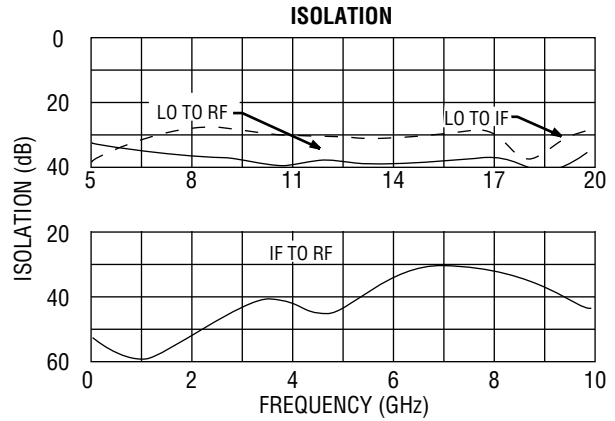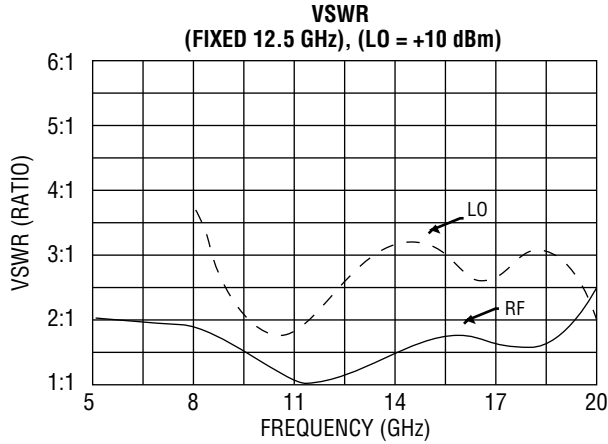

SINGLE-TONE (m) RF x (n) LO RELATIVE SPUR LEVEL (dBc)
(AVERAGE MIDBAND RF, LO, IF FREQUENCIES,
RF = -10 dBm, LO = +10 dBm)

SPUR (m) RF x (n) LO	RF TEST FREQ. (GHz)	LO TEST FREQ. (GHz)	SPUR LEVEL (dBc)
1 x 1	11	15	0
1 x 2	14.4	9.2	-38
1 x 3	16.4	6.8	-13
2 x 1	9	14	-50
2 x 2	12	14	-55
2 x 3	15.5	9	-46
3 x 1	7.33	18	-56
3 x 2	8	10	-55
3 x 3	10.66	12	-50

MAXIMUM RATINGS


Specification temperature..... +25°C
 Operating temperature -54 to +85°C
 Storage temperature -65 to +125°C

AVAILABLE OPTIONS

Medium/high dynamic range options
 M (LO = +13 to +17 dBm), (IP³ = +18 dBm)
 H (LO = +17 to +20 dBm), (IP³ = +22 dBm)
 DM0818, M, H (Conversion loss = 8 dB max.)

NOTE: Test data supplied at 25°C; conversion loss and LO-to-RF isolation.

OUTLINE DRAWINGS

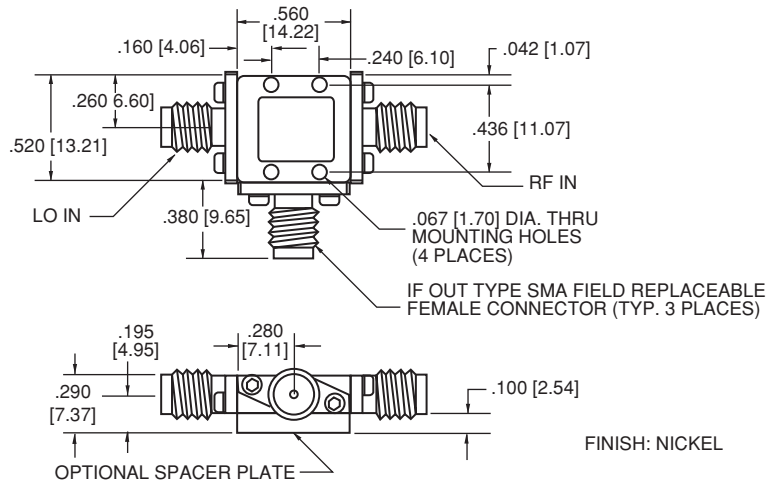

NOTE: All dimensions shown in brackets [] are in millimeters.

