
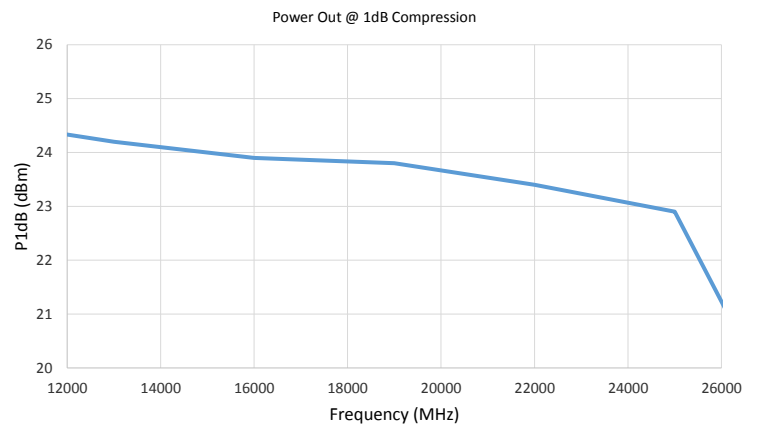
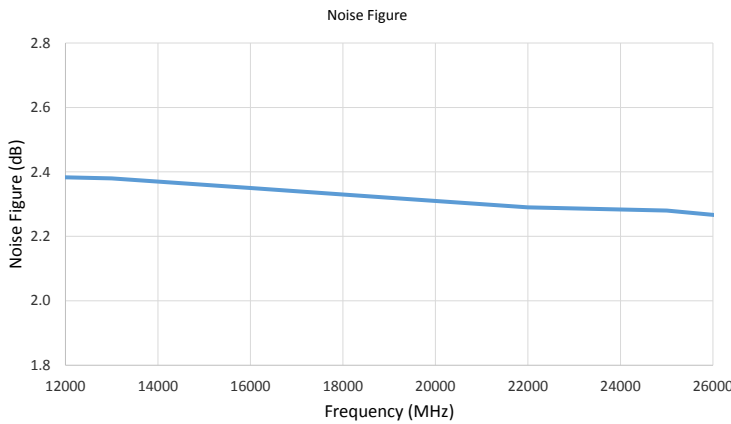
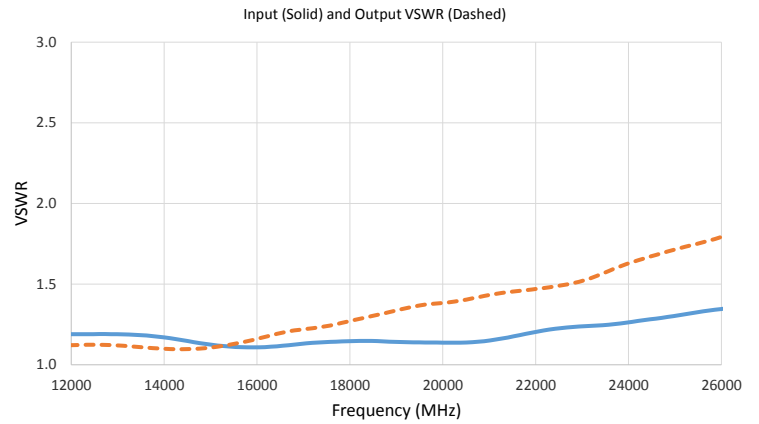


LNA-20-12002600-38-20P

LOW NOISE AMPLIFIER

*Typical data shown below

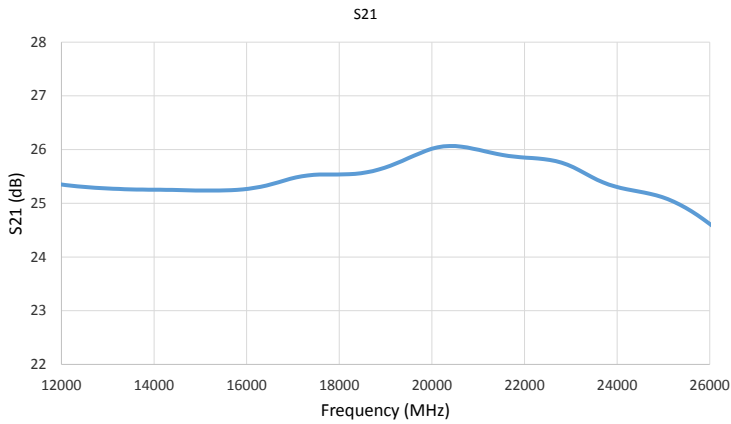

| Environmental Specifications | | |
|------------------------------------------------------------------------------------------------------------|-------------------------------------|------------------------|
| Parameter | Standard | Description |
| Operational temperature | | -55 C to +85 C |
| Storage temperature | | -65 C to +125 C |
| Random Vibration | MIL-STD-883K, Method 2026, Cond. IB | 50 - 2000 Hz, 7.3 Grms |
| Humidity | MIL-STD-202, Method 103B, Cond. B | 95% RH |
| Altitude | MIL-STD-883K, Method 1001, Cond. C | 50,000 feet |
| *Amplifiers are designed to meet the above conditions. If ESS testing is required please contact factory.* | | |

narda  **MITEQ**

435 Moreland Road
Hauppauge, NY 11788


Tel : 631-231-1700

Email : componentsnm@nardamiteq.com

www.nardamiteq.com

LNA-20-12002600-38-20P

LOW NOISE AMPLIFIER

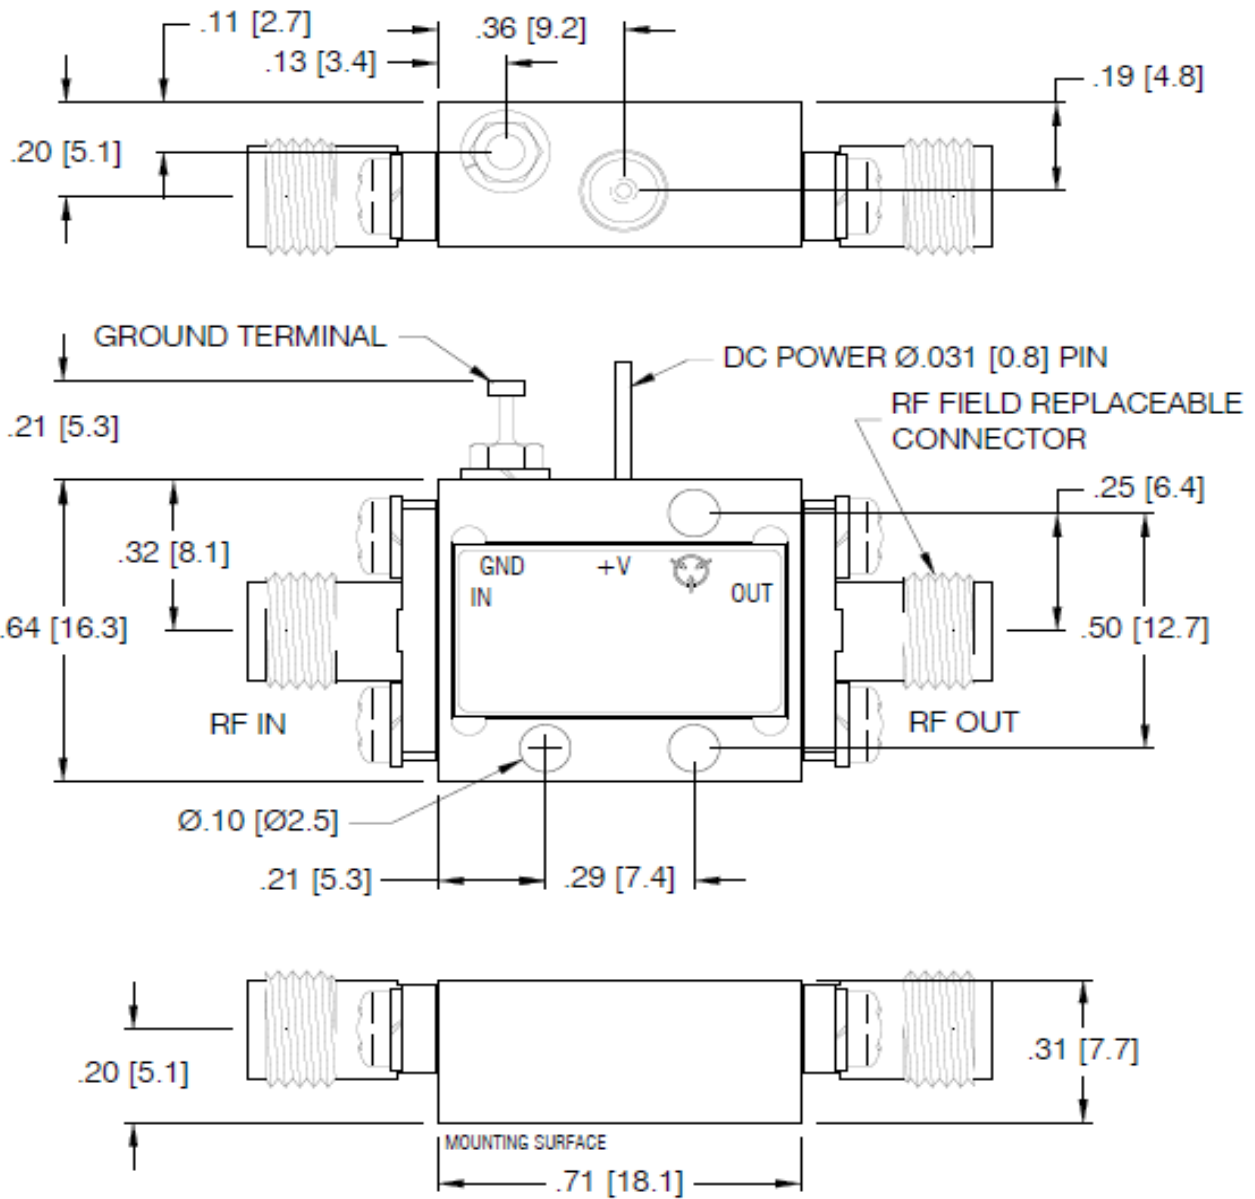

435 Moreland Road

Hauppauge, NY 11788

Tel : 631-231-1700

Email : componentsnm@nardamiteq.com

www.nardamiteq.com